

Ceiling&Floor Heat Pump System

Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

Indoor unit code	22022711000421
Model	B-VMH24UU-1
Indoor unit model	MUEU-24HRFN1-M(C)
Certified	AHRI  UL 




SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Room temperature		
Indoor(cooling)	(Deg. °F)	62~90
	(Deg. °C)	17~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30

INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFN-90-8-1
Qty		1.00
Input	(W)	96.00
Output	(W)	90.0
RLA	(A)	0.00
Speed(Hi/Mi/Lo)	(r/min)	1350/1260/1120
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	758.82/708.24/598.24
Indoor noise level (Hi/Med/Lo)	[dB(A)]	51/47.5/42
Dehumidification	(L/H)	3.06
Indoor unit		
Dimension (WxDxH)	(inch)	42.05x26.57x9.25
	(mm)	1068x675x235
Packing(WxDxH)	(inch)	45.08x29.72x12.52
	(mm)	1145x755x318
Net/Gross weight	(lbs.)	60.63/72.09
	(kg)	27.5/32.7

Indoor unit dimension

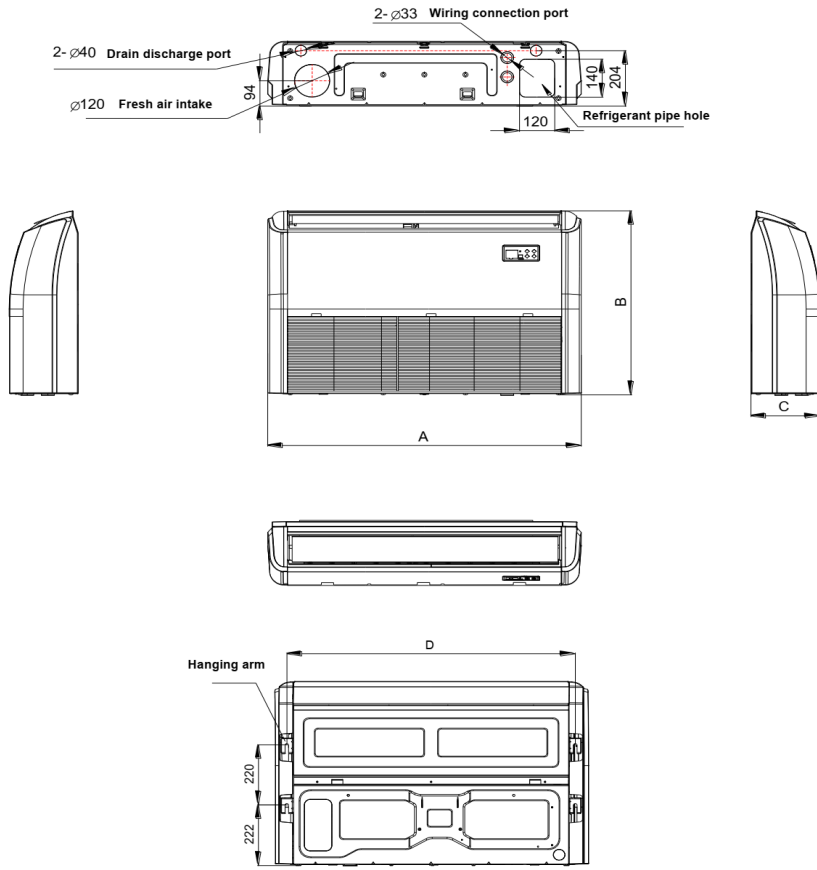

Capacity (Btu/h)	Unit	A	B	C	D
18K / 24K	mm	1068	675	235	983
	inch	42.05	26.57	9.25	38.70
36K	mm	1285	675	235	1200
	inch	50.59	26.57	9.25	47.24
48K/60K	mm	1650	675	235	1565
	inch	64.96	26.57	9.25	61.61