



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTHP12H130A-CY

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 208/230V/60

Cooling

Capacity	Btu/h	11800/12000
Input	W	1020/1040
Rated current	A	5.3/5.8
EER	Btu/w	10.5

Heating

Capacity	Btu/h	10500/10800
Rated Input (elect. Heater)	W	2897/3500
Rated current	A	13.7/15.3
Max. Current	A	NA

Compressor Electrical

Model	KSM100N11VEZ	
Type	ROTARY	
Brand	GMCC	
Capacitor	mF	35
Refrigerant type	oz	R32/26.80

Air flow & Noise level


Indoor air flow	CFM	344/439
Indoor noise level	dB(A)	51.5/52
Outdoor noise level	dB(A)	67

Indoor Fan Motor

Model	ZKFP-25-8-157L	
Input	W	70
Capacitor	uF	1.8
Speed(Hi/Lo)	rpm	1020/1100

Accessories

Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536A

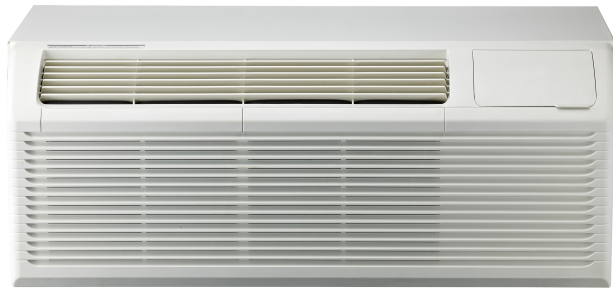

Outdoor Fan Motor

Model	YKT-58-4-3L	
Input	W	87
Speed	RPM	1580

Dimensional Data


Dimension(W*H*D)	inch	42.01x15.98x20.94
Packing (W*H*D)	inch	44.49x19.29x24.61
Net/Gross weight	lbs.	110.23/119.05

System Data

Design pressure	300/580 PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	6-20P

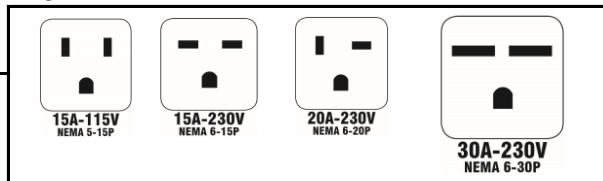

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Universal Remote	7602-512
Thermostat Locking Cover	7602-535