



Submittal Data

MODEL
REG-81R01

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 1Ph, 115V-, 60Hz

Cooling

Capacity	Btu/h	8000
Input	W	734
Rated current	A	8.9
Max. Current	A	9.5
CEER	Btu/w	10.9

Heating

Capacity	Btu/h	3500
RATED Input(Heater)	W	1390
Rated current	A	11.9

Compressor Electrical


Model	KSN66E11VBZC1	
Type	Rotary	
Brand	GMCC	
Capacity	Btu/h	7130
Input	W	577
Rated current(RLA)	A	5.10
Refrigerant type	oz	R32/11.11

Air flow & Noise level

Indoor air flow	CFM	523/435/389
Indoor noise level	dB(A)	60/56.5/55
Outdoor air flow	CFM	593/520/441
Outdoor noise level	dB(A)	66/60/57
Window Opening	Min/Max Width	26.8/36
	Min Height	16.5

Accessories

AS080	Window AC Support Bracket
NTN-2	Window AC Support Bracket

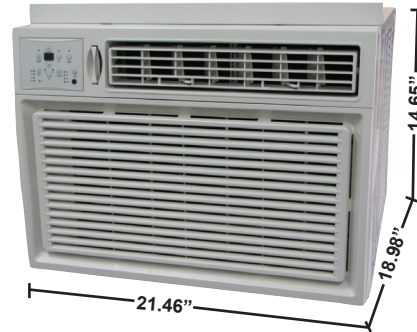

Fan Motor

Model	YKTS-90-4-12L-2	
Input	W	130/112/102
Speed	RPM	1350/1250/1120

Dimensional Data

Dimension(W*D*H)	inch	21.46x18.98x14.65
Packing (W*D*H)	inch	23.07x21.93x16.93
Net/Gross weight	lbs.	60.63/67.24

SYSTEM DATA

Design pressure	PSIG	300/580
Thermostat type	Touchpad/Remote	
Application area (Cooling EPA)	300-350	

Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	5-15P

