



Submittal Data

MODEL
RXTS-101A

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply 115V, 1Ph, 60Hz

Cooling

Capacity	Btu/h	10000
Input	W	890
Rated current	A	9.97
Max. Current	A	-----
CEER	Btu/w	15.0

Heating


Capacity	Btu/h	NA
RATED Input(Heater)	W	NA
Rated current	A	NA

Compressor Electrical

Model	KSK89D53UEZ	
Type	ROTARY	
Brand	GMCC	
Capacity	Btu/h	10071
Input	W	712
Rated current(RLA)	A	4.85
Refrigerant type	oz	R32/11.29

Air flow & Noise level

Indoor air flow	CFM	425/310/250
Indoor noise level	dB(A)	51/40/36
Outdoor air flow	CFM	790/634/486
Outdoor noise level	dB(A)	66/62.1/60.0
Window Opening	Min/Max Width	23/36
	Min Height	19.5

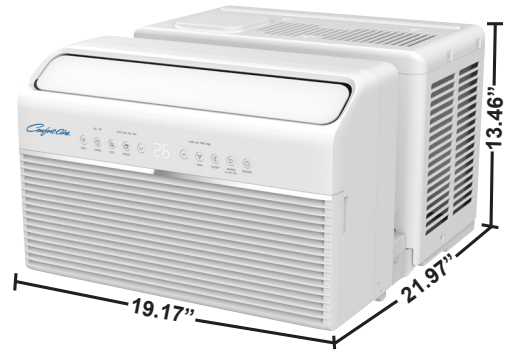

Fan Motor

Model	ZKFP-13-8-4	
Input	W	95
Speed	RPM	1720/1312/1108

Dimensional Data

Dimension(W*D*H)	inch	19.17x21.97x13.46
Packing (W*D*H)	inch	21.14x24.29x17.48
Net/Gross weight	lbs.	55.56/69

SYSTEM DATA

Design pressure	PSIG	300/520
Thermostat type	Touchpad/Remote	
Application area (Cooling EPA)	300-350	

Cord and Plug

Cord Length	ft.	5
Plug Face	Nema	LCDI(5-15P)

